

A

Contactors


- > Miniature, economical contactors for small motors and loads
- > Approved for worldwide use
- > High degree of climatic approvals and large ambient temperature range
- > DC model includes integrated diode/resistor surge suppressor



Miniature Three-pole Contactors with AC Coil ①

General Use [A]		Maximum UL / CSA Horsepower Ratings							Integrated Auxiliary Contacts		Catalog Number	Price
		Single Phase			Three Phase							
Open	Enclosed	115 V	200 V	230 V	200 V	230 V	460 V	575 V	NO	NC		
15	13.5	½	1	1½	2	3	5	5	1	0	DILEM-10◆	144
15	13.5	½	1	1½	2	3	5	5	0	1	DILEM-01◆	144

Miniature Three-pole Contactors with DC Coil ①②

General Use [A]		Maximum UL / CSA Horsepower Ratings							Circuit Diagram	Integrated Auxiliary Contacts		Catalog Number	Price
		Single Phase			Three Phase					NO	NC		
Open	Enclosed	115 V	200 V	230 V	200 V	230 V	460 V	575 V					
15	13.5	½	1	1½	2	3	5	5		1	0	DILEM-10-G◆	180
15	13.5	½	1	1½	2	3	5	5		0	1	DILEM-01-G◆	180

AC Coil Codes ①

Complete catalog number (◆) with...	Voltage Range	
	50Hz	60Hz
(24V60HZ)	–	24V
(110V50HZ,120V60HZ)	110V	120V
(208V60HZ)	–	208V
(190V50HZ,220V60HZ)	190V	220V
(230V50HZ,240V60HZ)	230V	240V
(415V50HZ,480V60HZ)	415V	480V
(600V60HZ)	–	600V

DC Coil Codes ①②

Complete catalog number (◆) with...	Voltage
(24VDC)	24V
(48VDC)	48V
(110VDC)	110V

Ordering Instructions

- 1 Locate the desired contactor
- 2 Complete the catalog number with coil code.
- 3 See pages A21 – A37 for auxiliaries and accessories.


- ① Coil not replaceable.
- ② Includes integrated resistor/diode surge suppressor.

Miniature Contactor

DILEM-...


Dimensions are in millimeters.
Not intended for manufacturing purposes.

A
Contactors

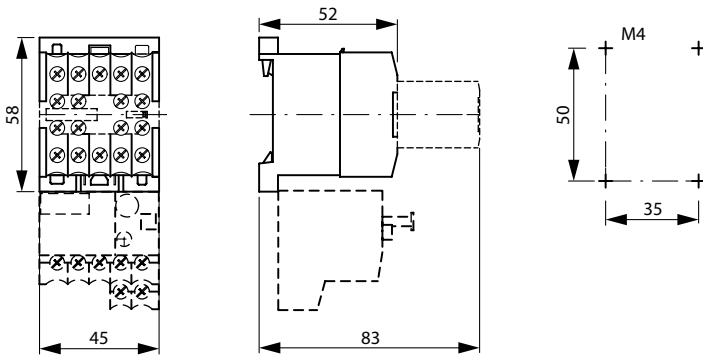

Reversing Combination

DIULEM...

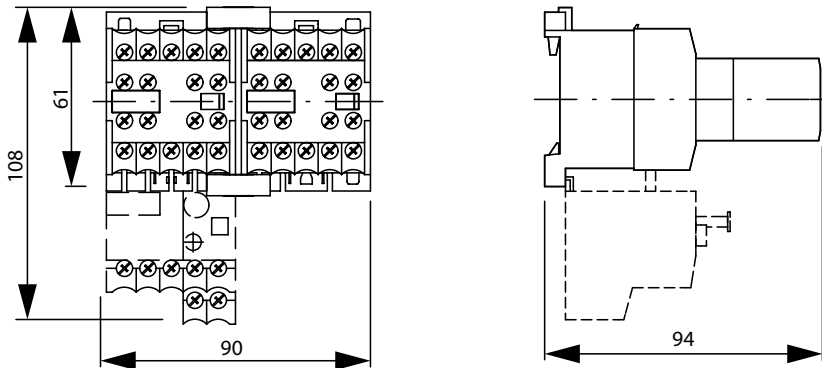

Star-Delta Starter Combinations

SDAINLEM...

